



Note:

Make full-size forms on 2" styrofoam.

Following an arc of 11-1/2" drawn on the styrofoam, stand the trimmed bricks on end, distributing them about 1/8" apart. With a "Sharpie" trace the inside faces onto the styrofoam. To aid in spacing the bricks during layup, mark a "tick" at each brick intersection. Cut the form at the lines traced from the brick face.

(Because the roof stands outside of the firebrick floor, cut 1-1/4" from the bottom to allow for the thickness of the floor.)

Using the first as a pattern, make four additional copies of the form. Keep them in the same orientation.

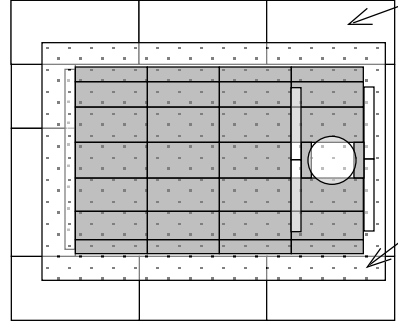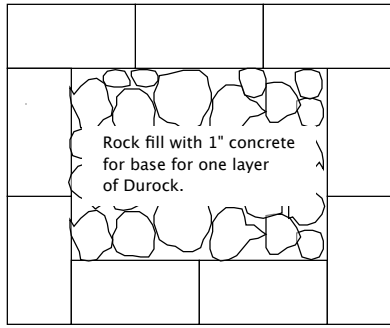

Mixture of mortar and perlite 4" to 6" over all with layers of poltry netting imbedded

